

**Floestone
Models 90 / 91 / 92
Drop Front**

**Architect's
Specifications**

Furnish and install square drop front mop receptor as manufactured by Floestone Products Co. Shoulder shall be not less than 4" high inside and not less than 1 3/4" wide. Galvanized, bonderized steel flange will extend at least one inch above shoulder on one, two or three sides for installation against stud wall (specify choice). Stainless steel protective cap to be cast integral on drop side (Model 91 and 92 only). Drain body shall be brass, cast integral and shall provide for a non-caulked connection (lead caulked optional) not less than one inch deep to a two or three inch pipe (specify 2" or 3"). Mop sinks with 3" drains are supplied with a rubber seal for use on ABS, PVC or steel pipe. Receptor shall be manufactured of tan and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 PSI, seven days after casting. Terrazzo surface shall be ground and polished with all air holes and/or pits to be grouted and excess removed and sealed to resist stains and moisture. Receptor will be reinforced with 16 gauge wire.

Note: Terrazzo is not designed to be used with anything that is over 130 degrees Fahrenheit.

Note:

Specify 2" or 3" drain size (3" standard).
Specify Model Number and size.





FLOESTONE PRODUCTS CO., INC.

2851 Falcon Drive • Madera, CA 93637
T. 559.661.4171 • T. 800.446.8827
F. 559.661.2070 • floestone.com



Shown: Model 90

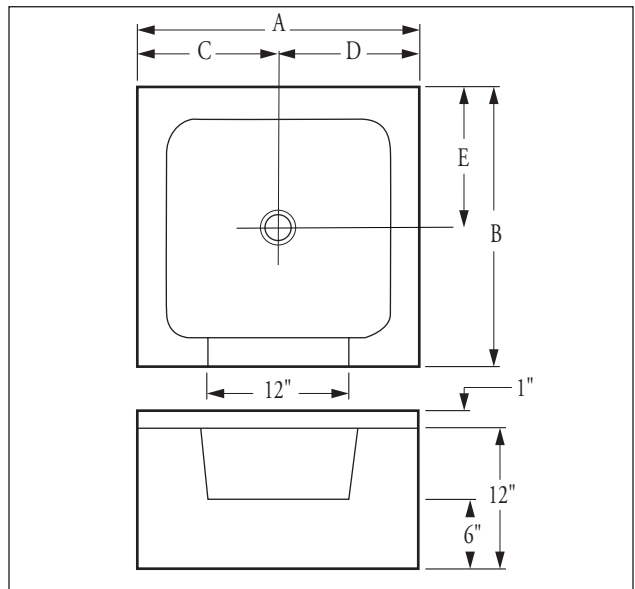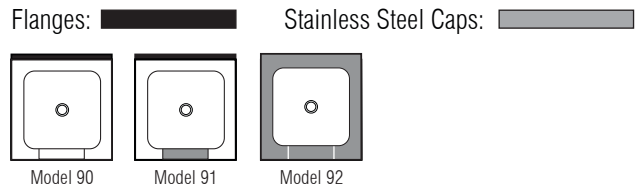

Dimensions may vary ± 1/4". Please check unit before installation.

Model	A	B	C	D	E	WT.
90	24"	24"	12"	12"	12"	310
90	32"	32"	16"	16"	16"	420
90	36"	24"	18"	18"	12"	400
90	36"	36"	18"	18"	18"	475
91	24"	24"	12"	12"	12"	310
91	32"	32"	16"	16"	16"	420
91	36"	24"	18"	18"	12"	400
91	36"	36"	18"	18"	18"	475
92	24"	24"	12"	12"	12"	310
92	32"	32"	12"	16"	16"	385
92	36"	24"	18"	18"	12"	400
92	36"	36"	18"	18"	18"	465