


Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	 Standard Features One-piece unit 2" Threshold AcrylX[™] applied acrylic Slip-resistant floor
Notes:	Interior Dimensions: 58" W x 30" D x 80" H Exterior Dimensions: 60" W x 31" D x 81 ½" H Skirt Height: 2" Weight: 235 lbs Wall Finish: Smooth Drain Location: Center Material: AcrylX™
CONFIGURATION (handed by valve wall) Fully Configured Valve Location: Left Side V Includes: One stainless steel soap dish; Symmons® pressure ba hand held shower head with hose and stainless steel slide bar/g stainless steel wrap bar. CUSTOM OPTIONS (Not Available if Fully Configured Option is see	alance mixing valve with concealed check stops; Moen [®] grab bar; a collapsible water dam; 2" drain; tension rod; one
Seat: Left-Handed Phenolic Seat Right-Handed F Straight Grab Bars (All Grab Bars are Stainless Steel unless o	
12"(left side wall) – QTY:	Y: 16" – QTY: 18" – QTY: Location: Location:
Pressure balancing mixing valve OPTIONAL ACCESSORIES Shower Curtain Curtain Rod 2" Drain Collapsi	ible Water Dam



ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

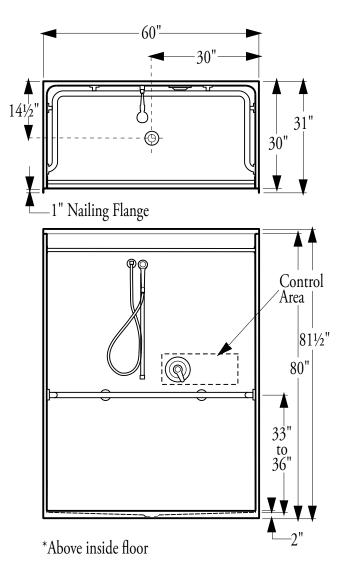

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date:

