


SUBMITTAL SHEET

60-33HTS Accessible Tub Shower

Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	•
	Standard Features • One-piece unit • AcrylX [™] applied acrylic • Slip-resistant floor
Notes:	-
	Interior Dimensions: 56" W x 31" D x 79" H Exterior Dimensions: 59 ¾" W x 32" D x 80 ½" H Skirt Height: 14 ½" Weight: 175 lbs Wall Finish: Smooth Drain Location: End (Left or Right) Material: AcrylX TM
CONFIGURATION (handed by seat)	
Fully Configured Drain Location: Left-Hall	nded Drain 🔲 Right-Handed Drain
Includes: Symmons® pressure balance mixing valve with con and stainless steel slide bar/grab bar; tension rod; two 18" st 36" stainless steel grab bars; molded-in corner soap dish	cealed check stops; Moen® hand held shower head with hose ainless steel grab bars; one 22" stainless steel grab bar; two
CUSTOM OPTIONS (Not Available if Fully Configured Option is	selected)
Seat: Left-Handed Phenolic Seat Right-Handed	d Phenolic Seat
Straight Grab Bars (All Grab Bars are Stainless Steel unless	s otherwise noted):
12"(left side wall) - QTY: 12"(right side wall) - G	QTY: 16" – QTY: 18" – QTY:
Location: Location:	Location:
22" – QTY: 24" – QTY: 26" – QTY: _	
Location: Location:	Location:
Fixture Wall: Left Right Back	
Hand-held shower assembly with 30" slide bar and 60" h	ose
Pressure balancing mixing valve	
OPTIONAL ACCESSORIES	
Shower Curtain Curtain Rod 2" Drain Colla	nsihla Watar Dam



ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

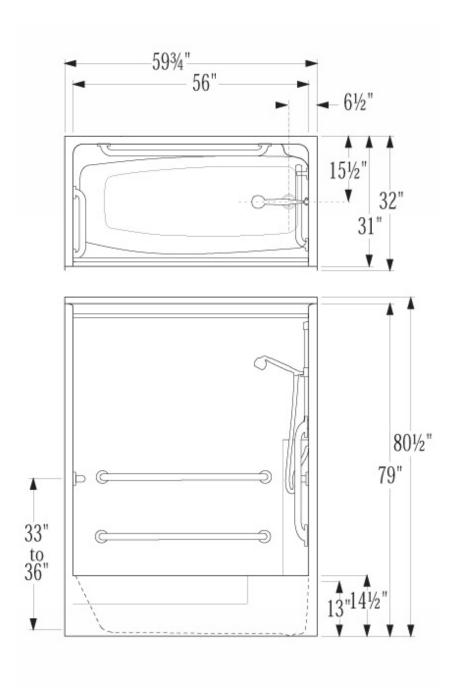

Plumbing Contractor Approval:	Date:
General Contractor Approval:	_ Date:
Engineer Approval:	_Date:
Architect Approval:	Date