


Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	 Standard Features One-piece unit 7/8" Threshold AcrylX[™] applied acrylic Slip-resistant floor
Notes:	Barrier-free when properly installed
	Interior Dimensions: 60" W x 32 ½" D x 79" H Exterior Dimensions: 62" W x 33 ½" D x 80" H Skirt Height: 7/8" Weight: 255 lbs Wall Finish: Smooth Drain Location: Center Material: AcrylX™
CONFIGURATION (handed by valve) Fully Configured – ADA* Valve Location: Valv	grab bar; a collapsible water dam; 2" drain; tension rod; one
Seat: Left-Handed Phenolic Seat Right-Handed P	
Straight Grab Bars (All Grab Bars are Stainless Steel unless of	
12"(left side wall) – QTY:	/: 16" – QTY: 18" – QTY: Location:
Fixture Wall: Left Right Back Hand-held shower assembly with 30" slide bar and 60" hose Pressure balancing mixing valve	
OPTIONAL ACCESSORIES	ble Water Dam





ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

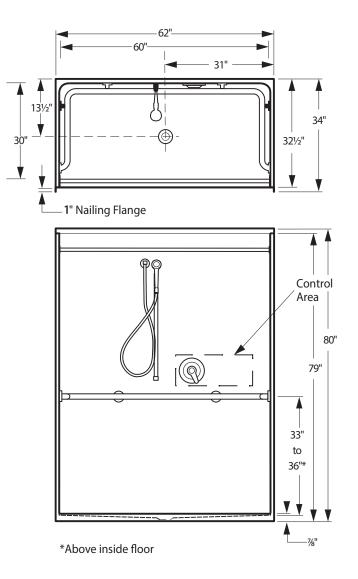

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date:

