


Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	 Standard Features One-piece unit 2" Threshold AcrylX[™] applied acrylic Slip-resistant floor
Notes:	Barrier-free when properly installed
	Interior Dimensions: 60" W x 38" D x 77" H Exterior Dimensions: 62" W x 39" D x 78" H Skirt Height: 2" Weight: 285 lbs Wall Finish: Simulated Tile Pattern Drain Location: Center Material: AcrylX [™]
CONFIGURATION (handed by valve) Fully Configured – ADA Valve Location: Includes: One stainless steel soap dish; Symmons® pressure ba hand held shower head with hose and stainless steel slide bar/g stainless steel wrap bar.	Left Side Wall Right Side Wall Back Wall alance mixing valve with concealed check stops; Moen® grab bar; a collapsible water dam; 2" drain; tension rod; one
CUSTOM OPTIONS (Not Available if Fully Configured Option is se	ected)
Seat: Left-Handed Phenolic Seat Right-Handed P Straight Grab Bars (All Grab Bars are Stainless Steel unless o	
12"(left side wall) – QTY: 12"(right side wall) – QTY Location: Location: 22" – QTY: 24" – QTY: Location: Location: Location: Location:	Location:
Fixture Wall: Left Right Back Hand-held shower assembly with 30" slide bar and 60" hose Pressure balancing mixing valve	e
OPTIONAL ACCESSORIES Shower Curtain Curtain Rod 2" Drain Collapsi	ible Water Dam



ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

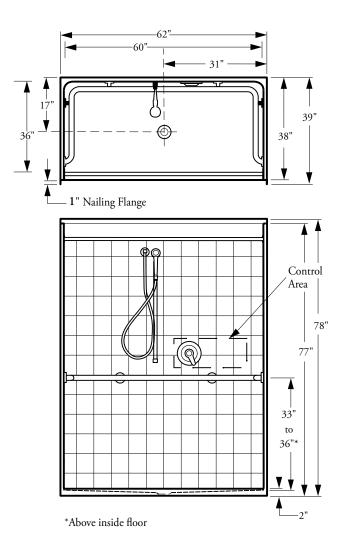

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date:

