


## **SUBMITTAL SHEET**

## 60-31HTS Tile Back Code Compliant Tub Shower

Customer:	PO #:
Job Name:	Quote#:
Date:	Quantity:
Ship To:	
	<ul> <li>Standard Features</li> <li>One-piece unit</li> <li>AcrylX™ applied acrylic</li> <li>Slip-resistant floor</li> </ul>
Notes:	Interior Dimensions: 56" W x 31" D x 79" H Exterior Dimensions: 59 ¾" W x 32" D x 80 ½" H Skirt Height: 14 ½" Weight: 200 lbs Wall Finish: Simulated Tile Pattern Drain Location: End (Left or Right) Material: AcrylX™
CONFIGURATION (handed by seat)  Fully Configured – ADA* Drain Location: Left-Hand Includes: Symmons® pressure balance mixing valve with conceand stainless steel slide bar/grab bar; tension rod; two 18" stain 22" stainless steel grab bar; one bathtub folding seat; molded-	ealed check stops; Moen® hand held shower head with hose nless steel grab bars; two 24" stainless steel grab bars; one
CUSTOM OPTIONS (Not Available if Fully Configured Option is s	
Seat: Left-Handed Phenolic Seat Right-Handed Straight Grab Bars (All Grab Bars are Stainless Steel unless of the stainless Steel unless Steel un	Phenolic Seat
12"(left side wall) – QTY: 12"(right side wall) – QT Location: Location: 24" – QTY: 26" – QTY:	Y: 16" – QTY: 18" – QTY: Location:
Location: Location: Fixture Wall: Left Right Back Hand-held shower assembly with 30" slide bar and 60" hos Pressure balancing mixing valve	Location:
OPTIONAL ACCESSORIES	



## ANY ALTERATIONS TO ACCESSORIES SHOWN BELOW, PLEASE NOTE ON THESE DRAWINGS.

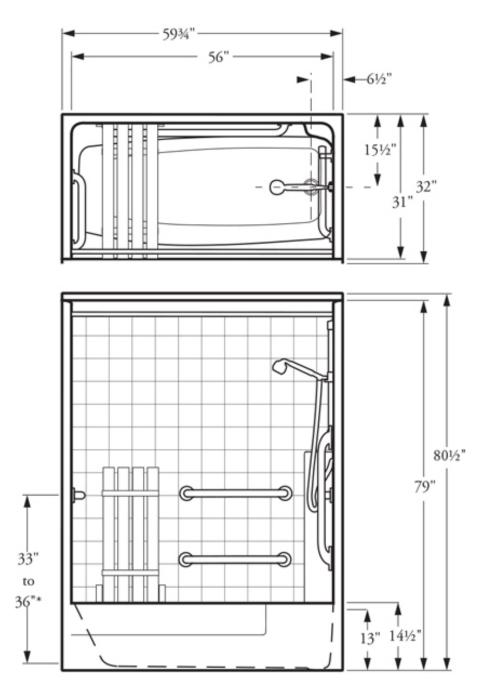

Plumbing Contractor Approval:	Date:
General Contractor Approval:	Date:
Engineer Approval:	Date:
Architect Approval:	Date: